

SLP-DX420

4 inch Direct Thermal Desktop Label Printer




Compact and Premium



Premium-Level Performance

- Fully Compatible with Market-Leading Programming Languages
- Fast Data Processing and Printing Speed up to 7 ips (178 mm/sec)
- Smart Media Detection™: Automatic paper detection

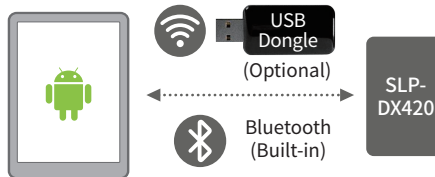

All in one Plus™ Interface

- Standard: USB + Serial + Parallel
- Optional: USB + Serial + Ethernet + WLAN*
USB + WLAN* + Bluetooth**
- * WLAN: 802.11b/g/n USB dongle type (Optional)
- ** Bluetooth: Built-in type, MFi iAP2 certified



Function-keys

User-Friendly Design

- Easy paper loading with adjustable paper guide
- Pause and cancel function-keys
- Various Options: Standard, peeler and auto-cutter

SLP-DX420

4 inch Direct Thermal Desktop Label Printer

Specifications

Printer Specifications

Print Method

Direct Thermal

Print Speed

SLP-DX420: Up to 7 ips (178 mm/sec)
SLP-DX423: Up to 5 ips (127 mm/sec)

Print Resolution

SLP-DX420: 203 dpi
SLP-DX423: 300 dpi

Print Width

SLP-DX420: Up to 108 mm
SLP-DX423: Up to 105.7 mm

Print Length

Up to 1,000 mm

Sensor

Transmissive, Reflective (Adjustable),
Head open

Media Characteristics

Media Type

Gap, Black Mark, Notch, Continuous, Fan-Fold

Media Width

20 ~ 110 mm

Media Roll Diameter

Up to 130 mm

Media Thickness

0.06 ~ 0.20 mm

Supply Method

Easy Paper Loading

Inner Core

25.4 ~ 38.1mm

Physical Characteristics

Dimensions (WxDxH)

194 x 243 x 171 mm
(7.63 x 9.56 x 6.73 inch)

Weight

2.20 kg (4.85 lbs.)

Electrical

EnergyStar Certified,
External Power Adaptor 100-240V AC, 50/60Hz

Performance Characteristics

Memory

64 MB SDRAM, 128 MB Flash

Interface

Standard: USB + Serial + Parallel
Optional: ① USB + Serial + Ethernet + WLAN¹
② USB + WLAN* + Bluetooth²

WLAN¹: 802.11a/b/g/n/ac USB dongle type
(Optional)

Bluetooth²: Built-in type, MFi iAP2 certified

Real Time Clock

Supported

Environment Characteristics

Temperature

Operating: 0 ~ 40°C (32 ~ 104°F)
Storage: -20 ~ 60°C (-4 ~ 140°F)

Humidity

Operating: 10 ~ 80% RH
Storage: 10 ~ 90% RH

Reliability

Thermal Print Head (TPH)

25 Km

Auto Cutter

0.3 Million Cuts

Software

Emulation

SLCST[™], BPL-Z[™] (ZPLII), BPL-E[™] (EPL)

Driver / Utility

Windows Driver (Europlus / Seagull),
Linux / Mac CUPS Driver,
Virtual COM USB / Ethernet Driver,
Utility Program, OPOS / JPOS Driver,
Bartender Ultralite for BIXOLON, Label Artist-II[™],
SAP[®] Device Driver

SDK / Plugin

Android / iOS / Windows SDK, Linux SDK,
Chrome SDK, Xamarin SDK

Application

Label Artist[™] Mobile (Android, iOS),
mPrint App (iOS), mPrint Server (Windows, iOS)

MDM

BIXOLON Profile Manager
- XPM[™], XCM[™] (Windows, Android)

Fonts / Graphics / Symbologies

Fonts

10 SLCST[™] / One SLCST[™] / 16 BPL-Z[™] /
One BPL-Z[™] / 5 BPL-E[™] / 23 Code Page /
Unicode supported (UTF-8, UTF-16LE,
UTF-16BE)

Graphics

Supporting user-defined fonts, graphics,
formats, and logos

Barcode Symbologies

1D: Codabar, Code 11, Code 39, Code 93,
Code 128, EAN-13, EAN-8, Industrial 2-of-5,
Interleaved 2-of-5, Logmars, MSI, Plessey,
Postnet, GS1 DataBar (RSS-14), Standard
2-of-5, UPC/EAN extensions, UPC-A, UPC-E,
IMB
2D: Aztec, Codablock, Code 49, Data Matrix,
MaxiCode, MicroPDF417, PDF417, QR code,
TLC 39

Options

Peeler, Auto Cutter, External Paper Supply,
WLAN Dongle (Consensus required)