




# ULTRaV

by ARMOR

Very high darkness  
 Very good print quality  
 Excellent receptor multi-compatibility  
 and sensitivity


ultra v by ARMOR is the result of the taking over of ICONEX's intellectual property. ultra v by ARMOR is a well-known and well established ribbon thanks to its very well balanced performance in addition to its exceptional darkness. It completes the ARMOR range as a specialty wax-resin ribbon.

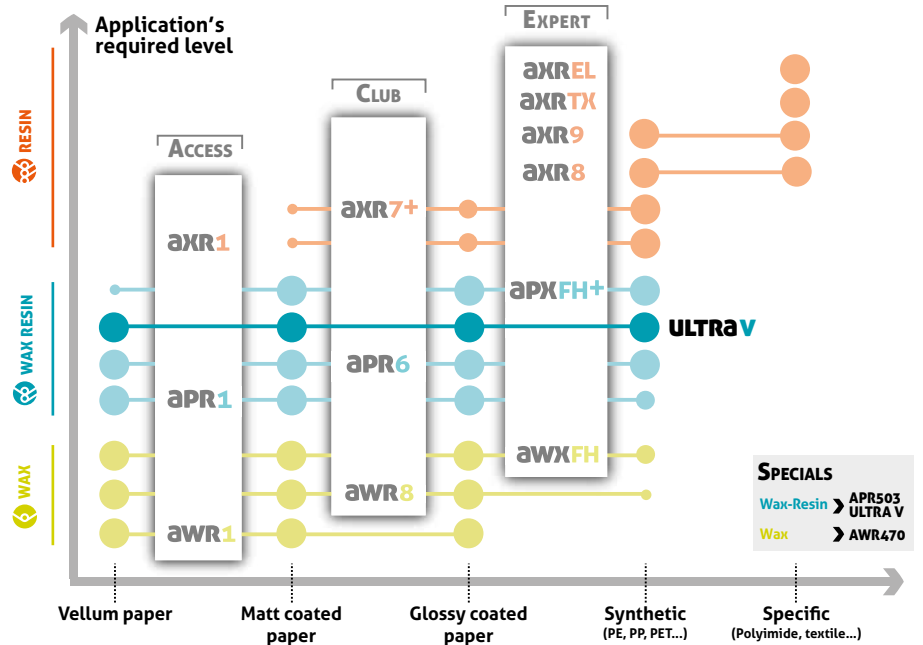


## Printing receptor

papers		synthetics	
Vellum	●●●	PP	●●●
Coated	●●●	PE	●●●
Glossy coated	●●●	PET	●●●

## Printer settings

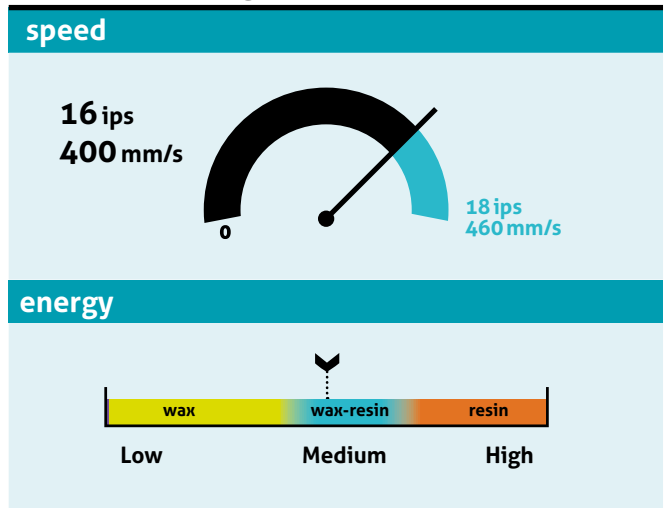

## Print resistance

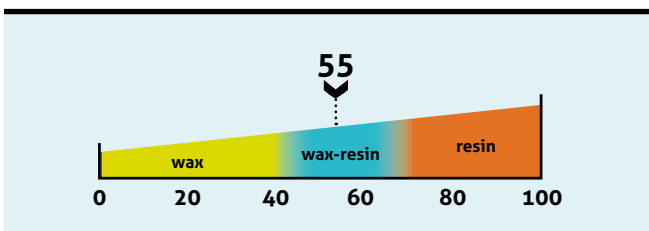

## Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65

## Your ribbon identity

Colours: ● ○ ● ● ● ● ●


Length (m): .....

Width (mm): .....

Part number: .....

Your distributor: .....

Contact : .....





# ULTRaV

by ARMOR

## Application fields




## Product performance

print quality		
90°Barcode	90	A <sub>a</sub> Small characters
0°Barcode	100	2D Barcode
Logos	95	Blackness
		Optical Density by Reflection, measured using a densitometer.
technical resistances		
Heat	100°C / 212°F	Light/Blue Wool
	300°C / 572°F	Solvents
Water/Submerge	100	Rubbing
		65

## Product physico-chemical features

product structure	
<b>PET film</b>	Thickness: 4,5 µm
<b>Ink</b>	Wax-Resin
Melting point	85°C/185°F
<b>Backcoating</b>	Silicon based
Coefficient of Friction	Kd < 0.2
<b>Ribbon thickness</b>	< 9 µm
The ribbon is anti static build-up treated	

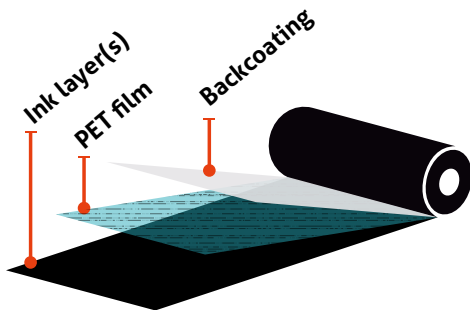

## Storage

### storage conditions

12 months recommended  
20-80 % Humidity Rate, 5-35°C (40-95°F)

## Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.